


PL12-CAT6



- Surge protector for CAT6
- 12 ports
- 19" patch panel 1 U
- 100/1000/10Gigabit Ethernet network compliance
- Connectors RJ45 shielded
- Bi-directionnel

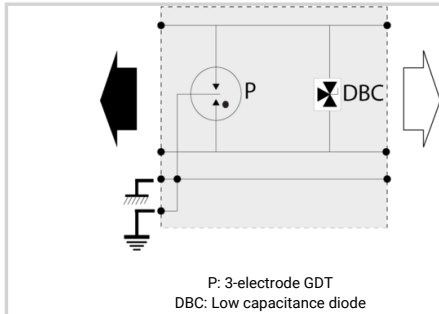

Electrical Characteristics		
Network		10 Gigabit Ethernet, Cat.6 cabling
Nominal line voltage	Un	5 Vdc
Max. DC operating voltage	Uc	8 Vdc
Max. frequency	f max.	250 MHz
Max. data rate		10/100/1000 Mbps
Insertion loss		< 1 dB
Max. load current	IL	1000 mA
Protection levelFollowing the test category C3 (IEC61643-21) - Line/Line	Up	20 V
Max. capacitance	C	< 25 pF
Impulse current2 x 10/350µs Test - D1 Category	Iimp	500 A
Line/Line Nominal discharge current C2 Category	In L/L	500 A
Line/Ground Nominal discharge current 8 /20µs Test x 10 - C2 Category	In L/PE	2000 A
Mechanical Characteristics		
Technology		GDT+Clamping diode
SPD configuration		12 ports de 8 wires
Connection to Network		RJ45 shielded female input/output
Format		Rack 19"
Mounting		Baie 19"
Housing material		Aluminium
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Outdoor application		No
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt
Spare module(s)		12-port PCB
Remote signaling of disconnection		No
Pinout		(1-2)(3-6)(4-5)(7-8)
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497 B / IEEE 802-3an
Part number		
581534		